# RNAV (GPS) RWY 5

EARLY COUNTY (BIJ)

| WAAS | APP CRS | Rwy Idg | 5494 |
|---|---|---|---|
| CH 61121 | 053° | TDZE | 215 |
| W05A | | Apt Elev | 215 |

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Rwy 5 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using Bainbridge altimeter setting. When local altimeter setting not received, use Bainbridge altimeter setting and increase LPV DA to 605 feet and all visibilities ⅛ SM. Increase LNAV/VNAV DA to 657 feet and all visibilities ⅜ SM. Increase all MDA 80 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM.

MISSED APPROACH: Climb to 3000 direct PARGE and hold.

| AWOS-3PT | CAIRNS APP CON ★ | CTAF |
|---|---|---|
| 118.475 | 125.4 327.125 | 122.9 (L) |

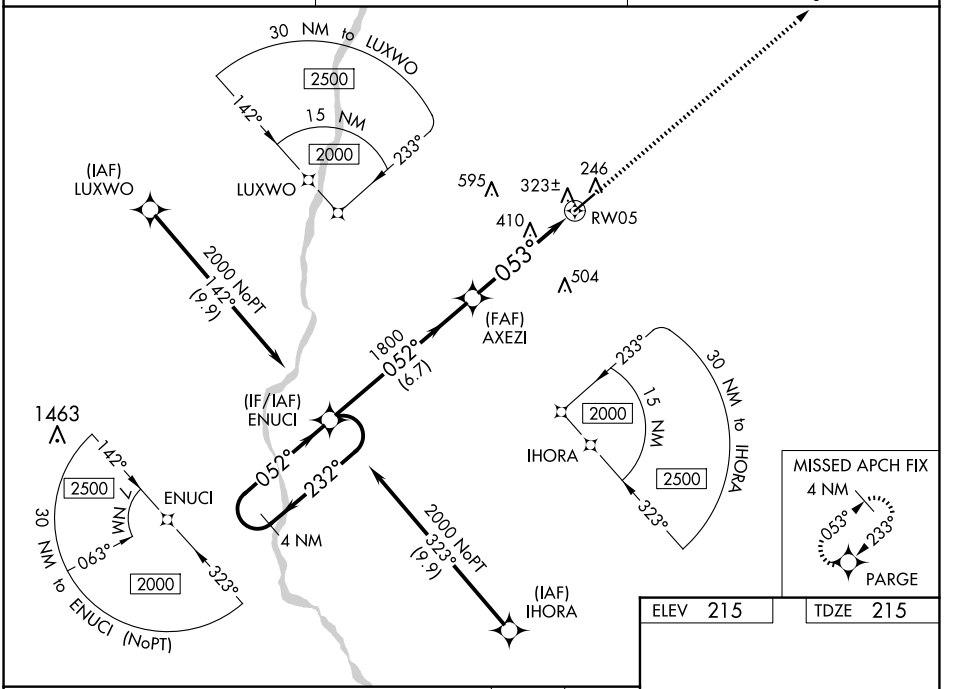


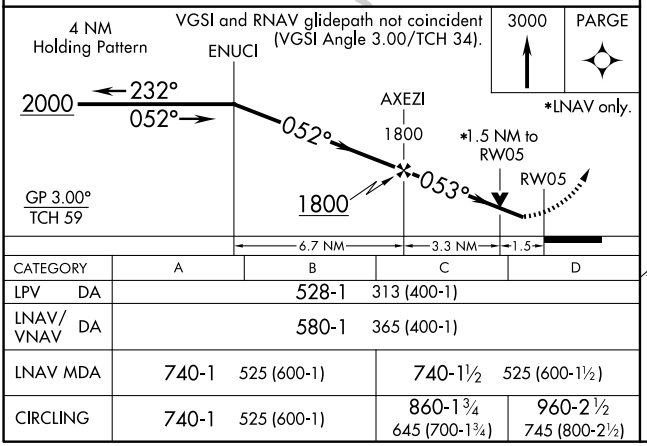


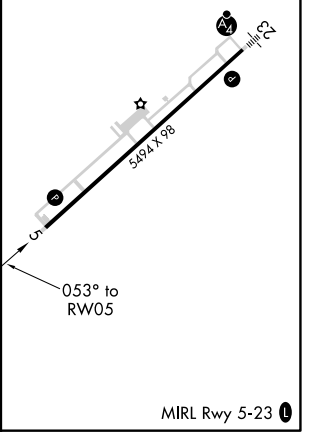


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | | 528-1 | 313 (400-1) | |
| LNAV/VNAV DA | | 580-1 | 365 (400-1) | |
| LNAV MDA | 740-1 | 525 (600-1) | 740-1½ | 525 (600-1½) |
| CIRCLING | 740-1 | 525 (600-1) | 860-1¾ 645 (700-1¾) | 960-2½ 745 (800-2½) |

MIRL Rwy 5-23 (L)



SE-4, 01 OCT 2026 to 29 OCT 2026
SE-4, 01 OCT 2026 to 29 OCT 2026