WAAS	APP CRS	Rwy Ldg	4899
CH 56437	068°	TDZE	661
W07A		Apt Elev	661

RNAV (GPS) RWY 7


PIKE COUNTY (EOP)


RNP APCH - GPS

T NA Rwy 7 helicopter visibility reduction below 1 SM NA. Straight-in Rwy 7 NA at night, Circling Rwy 7 NA at night. When local altimeter setting not received, use PMH altimeter setting and increase all MDAs 60 feet and LNAV visibility Cat C ⅛ SM, and LP visibility Cat C ⅛ SM, and Circling all visibilities ¼ SM.

MISSED APPROACH: Climb to 3000 direct IGMIY and hold.

AWOS-3PT	INDIANAPOLIS CENTER	UNICOM
121.45	135.575 290.5	123.0 (CTAF) L

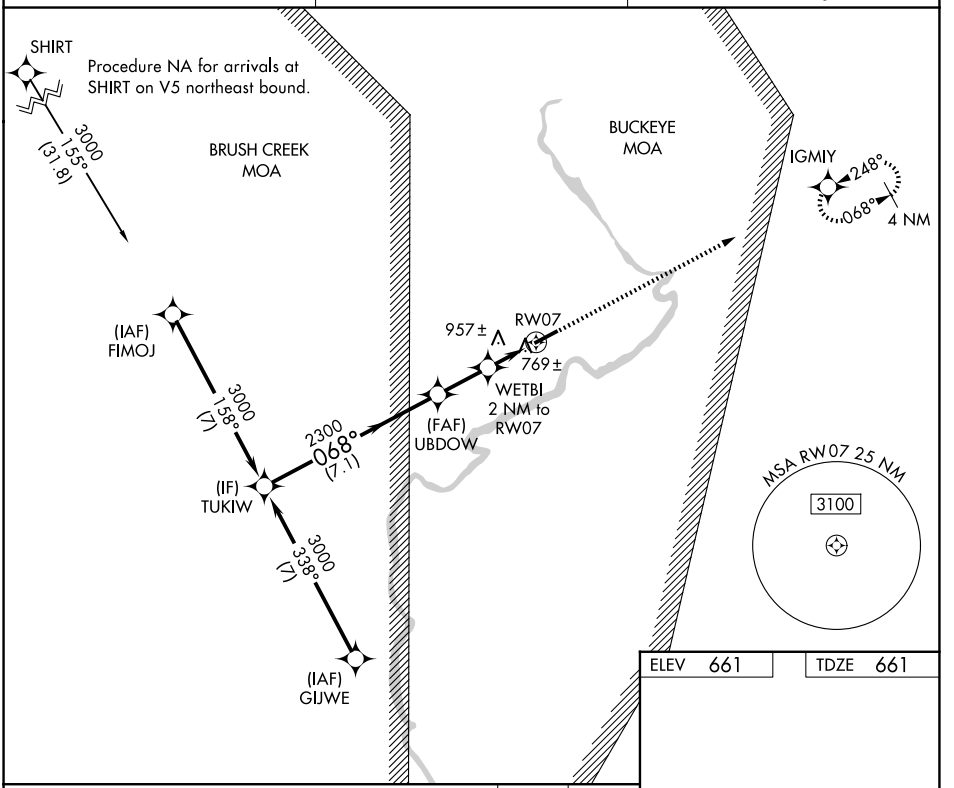

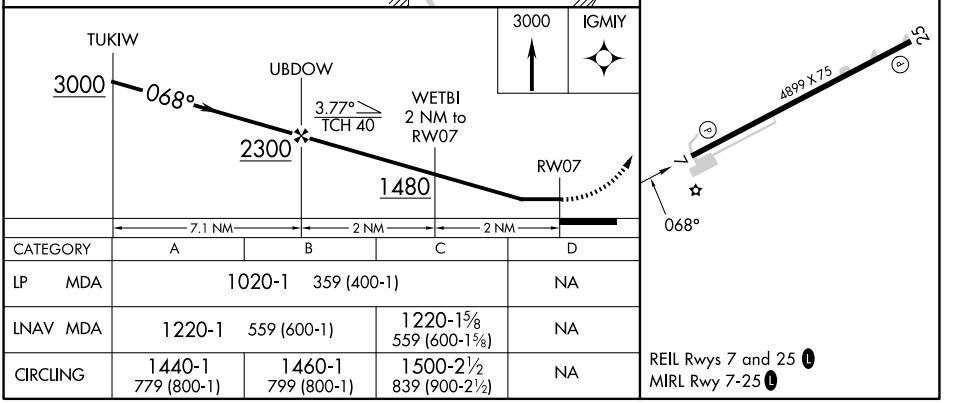

CATEGORY	A	B	C	D
LP MDA	1020-1 359 (400-1)			NA
LNAV MDA	1220-1 559 (600-1)		1220-1⅝ 559 (600-1⅝)	NA
CIRCLING	1440-1 779 (800-1)	1460-1 799 (800-1)	1500-2½ 839 (900-2½)	NA

REIL Rwys 7 and 25 L
MIRL Rwy 7-25 L

EC-2, 01 OCT 2026 to 29 OCT 2026
EC-2, 01 OCT 2026 to 29 OCT 2026