WAAS	APP CRS		
CH **68560**	**340°**	Rwy Idg	**5020**
W34B		TDZE	**4529**
		Apt Elev	**4534**

RNAV (GPS) RWY 34

ROGERS FLD (OØ5)

RNP APCH - GPS.

When local altimeter setting not received, procedure NA.
Rwy 34 helicopter visibility reduction below ¾ SM NA.
Circling NA for Cat C west of Rwy 16-34. Circling NA at night.

MISSED APPROACH: (Do not exceed 165K until initial turn completion) Climb to 5200 then climbing right turn to 10500 direct CHOTT and hold, continue climb-in-hold to 10500.
*Missed approach requires a minimum climb of 377 feet per NM to 7680 feet.

AWOS-3	OAKLAND CENTER	UNICOM
118.275	**132.2 350.3**	**122.8** (CTAF) L

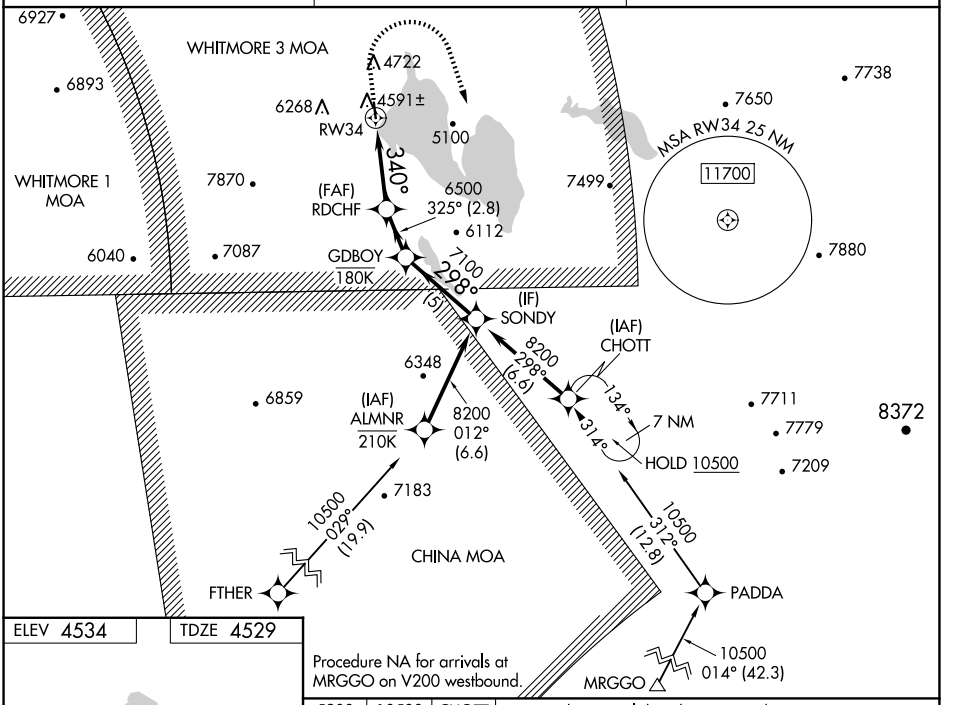

SW-2, 01 OCT 2026 to 29 OCT 2026

SW-2, 01 OCT 2026 to 29 OCT 2026

ELEV 4534 TDZE 4529

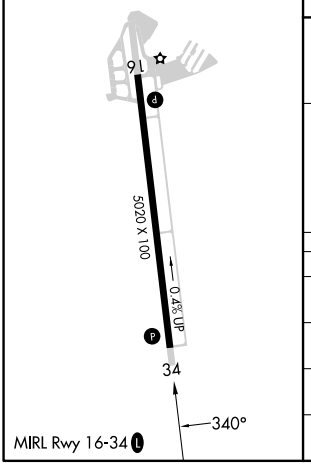

Procedure NA for arrivals at MRGGO on V200 westbound.

5200	10500	CHOTT

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 32)

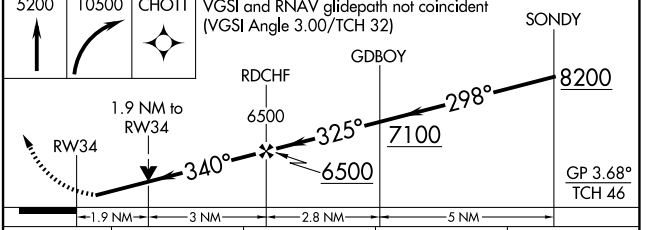

CATEGORY	A	B	C	D
LPV DA*	4779-¾ 250 (300-¾)		4829-⅞ 300 (300-⅞)	NA
LNAV MDA*	5160-1 631 (700-1)		5160-1¾ 631 (700-1¾)	NA
LNAV MDA	5360-1 831 (900-1)	5360-1¼ 831 (900-1¼)	5360-2½ 831 (900-2½)	NA
CIRCLING	5440-1¼ 906 (1000-1¼)	5660-1½ 1126 (1200-1½)	5660-3 1126 (1300-3)	NA