

WAAS CH 63143 W25A	APP CRS 253°	Rwy Ldg 4000 TDZE 175 Apt Elev 179
--	------------------------	---

RNAV (GPS) RWY 25

BOB BAKER MEML (IAN) (PAIK)

RNP APCH - GPS.


⚠

-28°C

Circling NA north of Rwy 7-25. Circling Rwy 7 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C or above 54°C. Baro-VNAV and VDP NA when using WLK/PASK altimeter setting. When local altimeter setting not received, use WLK/PASK altimeter setting and increase LPV DA* to 531 feet; increase LPV DA to 720 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 888 feet and all visibilities ¼ SM. Increase all MDAs 100 feet.

MISSED APPROACH: Climb to 900 then climbing left turn to 4000 direct KOBXU and hold, continue climb-in-hold to 4000.
*Missed approach requires minimum climb of 335 feet per NM to 1440.

AWOS-3P 119.025	ANCHORAGE CENTER 119.2 263.0	CTAF 122.7
---------------------------	--	----------------------

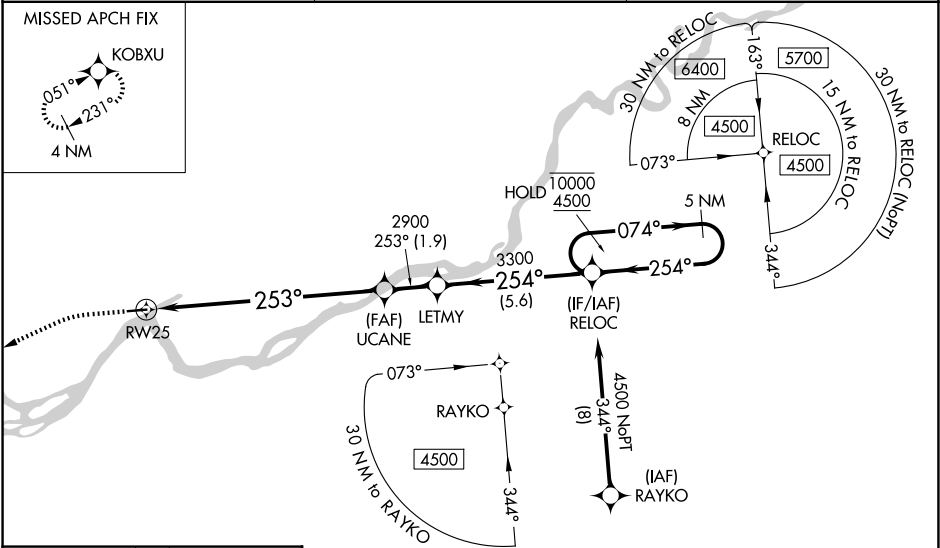

ELEV 179

TDZE 175

900

4000

KOBXU

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 29).

LETMY

RELOC

5 NM Holding Pattern

10000

4500

074°

254°

254°

3300

253°

2900

UCANE

2900

4.9 NM to RW25

4.9 NM

3.7 NM

1.9 NM

5.6 NM

GP 3.00° TCH 35

4000 X 75

0.8% UP

253°

RW25

MIRL Rwy 7-25

REIL Rwy 25