

APP CRS	Rwy Ldg	4300
228°	TDZE	2864
	Apt Elev	2869

RNAV (GPS) RWY 23

FORT BENTON (79S)

RNP APCH - GPS.


▼

Procedure NA at night. When local altimeter setting not received, use HVR altimeter setting and increase all MDAs 180 feet and LNAV visibility Cat C ½ SM and Circling visibility Cat C ¾ SM. Circling NA to Rwy 14-32. Rwy 23 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH:

Climbing right turn to 5000 direct JOTUN and hold.

AWOS-3PT 121.125	SALT LAKE CENTER 133.4 285.4	UNICOM 122.8 (CTAF) 0
---------------------	---------------------------------	--------------------------

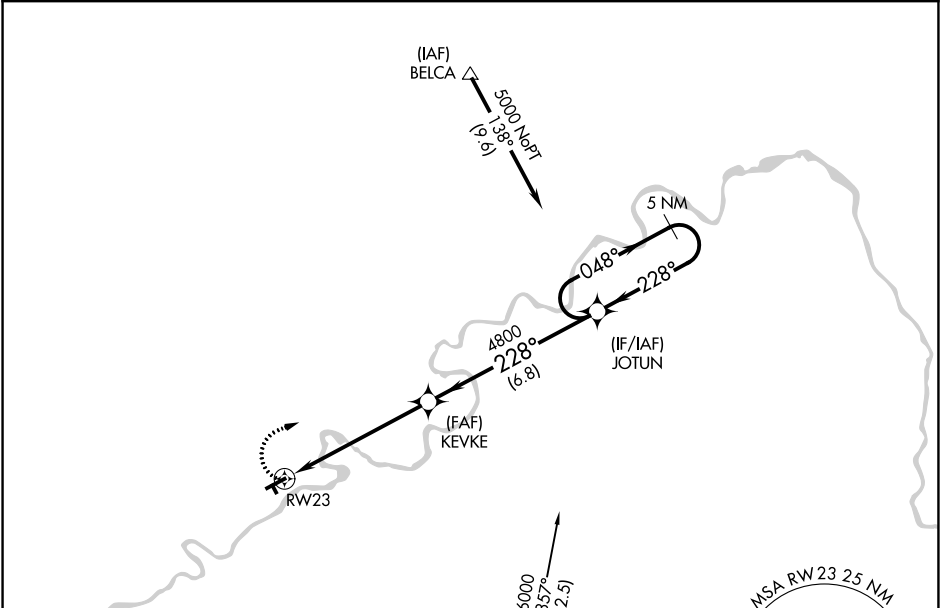

ELEV 2869

TDZE 2864

MIRL Rwy 5-23 0

	JOTUN		5 NM Holding Pattern	
	KEVKE		5000	
	RWY 23		4800	
	5.9 NM		6.8 NM	
CATEGORY	A	B	C	D
LNAV MDA	3340-1	476 (500-1)	3340-1⅜ 476 (500-1⅜)	NA
CIRCLING	3340-1	471 (500-1)	3460-1½ 591 (600-1½)	NA