

WAAS
CH **99311**
W12A

APP CRS
123°

Rwy Ldg **4000**
TDZE **42**
Apt Elev **42**

RNAV (GPS) RWY 12

QUINHAGAK (AQH) (PAQH)

RNP APCH.


▼

⚠

Procedure NA at night. Baro-VNAV and VDP NA when using Kipnuk altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. When local altimeter setting not received, use Kipnuk altimeter setting and increase all DA and MDA 160 feet; increase LPV all Cats visibility and LNAV/VNAV all Cats visibility $\frac{1}{8}$ SM, LNAV Cats C, D visibility $\frac{3}{8}$ SM, increase Circling Cat C visibility $\frac{1}{2}$ SM, increase Circling Cat D visibility $\frac{1}{4}$ SM.

MISSED APPROACH: Climb to 5200 direct CUTEB and hold, continue climb-in-hold to 5200.

AWOS-3P 121.575	ANCHORAGE CENTER 125.2 372.0	KENAI RADIO 122.1	CTAF 122.8
---------------------------	--	-----------------------------	----------------------

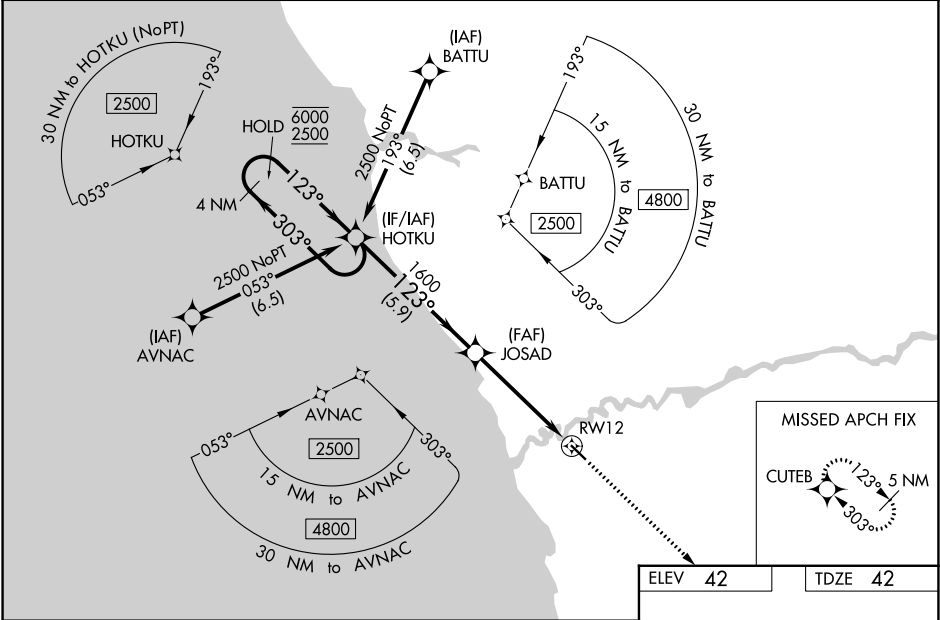

4 NM Holding Pattern

6000

2500

GP 3.00°

TCH 35

HOTKU

JOSAD

RWY 12

5200

CUTEB

*LNAV only.

123°

123°

123°

5.9 NM

3.4 NM

1.4 NM

CATEGORY	A	B	C	D
LPV DA	292-1 250 (300-1)			
LNAV/VNAV DA	292-1 250 (300-1)			
LNAV MDA	500-1	458 (500-1)	500-1 $\frac{3}{8}$	458 (500-1 $\frac{3}{8}$)
CIRCLING	500-1	458 (500-1)	580-1 $\frac{1}{2}$ 538 (600-1 $\frac{1}{2}$)	600-2 558 (600-2)

MIRL Rwy 12-30