

WAAS CH 50133 W11A	APP CRS 105°	Rwy Ldg TDZE 1183 Apt Elev 1183
--	------------------------	---

RNAV (GPS) RWY 11
PAYNESVILLE MUNI (PEX)

RNP APCH - GPS.


▼

▲

Baro-VNAV and VDP NA when using Lf altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Lf altimeter setting and increase LPV DA to 1434 feet; increase LNAV/VNAV DA to 1704 feet and all visibilities ¼ SM. Increase all MDAs 60 feet and LNAV and Circling visibility Cat C ¼ SM.

MISSED APPROACH:
Climb to 3000 direct
UDALE and hold.

AWOS-3PT 120.35	MINNEAPOLIS CENTER 125.5 323.1	CTAF 122.9
---------------------------	--	----------------------

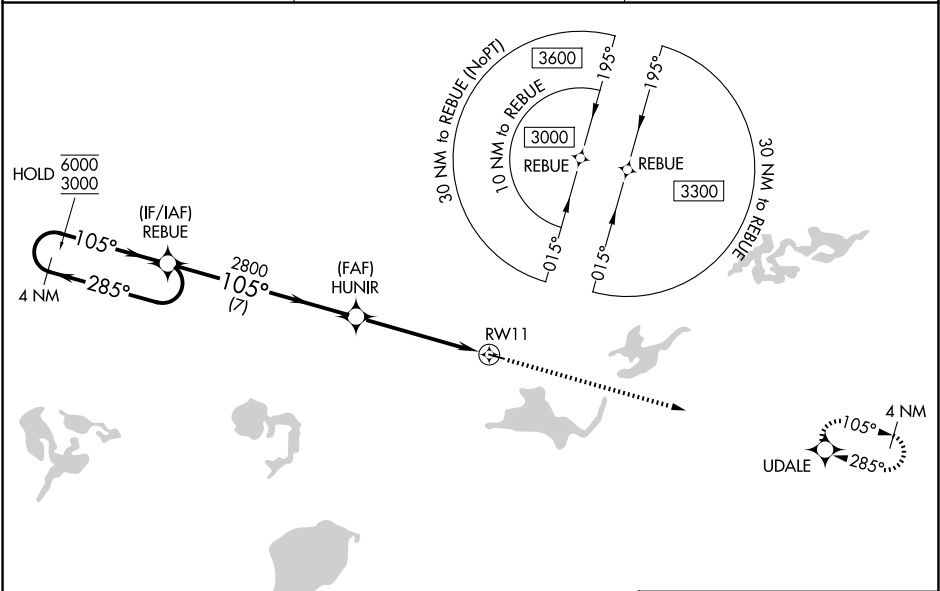

ELEV 1183 TDZE 1183

4 NM Holding Pattern

REBUE

HUNIR

UDALE

GP 3.00° TCH 42

7 NM 3.5 NM 1.4 NM

CATEGORY	A	B	C	D
LPV DA	1383-1 200 (200-1)			NA
LNAV/VNAV DA	1653-1⅜ 470 (500-1⅜)			NA
LNAV MDA	1680-1 497 (500-1)		1680-1⅜ 497 (500-1⅜)	NA
CIRCLING	1680-1 497 (500-1)	1760-1 577 (600-1)	1920-2 737 (800-2)	NA

MIRL Rwy 11-29

REIL Rws 11 and 29