

WAAS CH 49246 W16A	APP CRS 157°	Rwy Idg TDZE 1729 Apt Elev 1730
--	------------------------	---

RNAV (GPS) RWY 16



WILDER (6E5)

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. Rwy 16 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using MDS altimeter setting. When local altimeter setting not received, use MDS altimeter setting and increase LPV DA to 2055 feet; increase LNAV/VNAV DA to 2200 feet and all visibilities ½ SM. Increase all MDAs 80 feet.

MISSED APPROACH: Climb to 3600 direct JAPPY and hold.

AWOS-3P 118.15	MINNEAPOLIS CENTER 126.25 339.8	CTAF 122.90
--------------------------	---	-----------------------

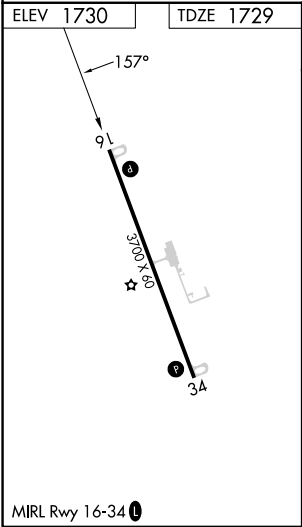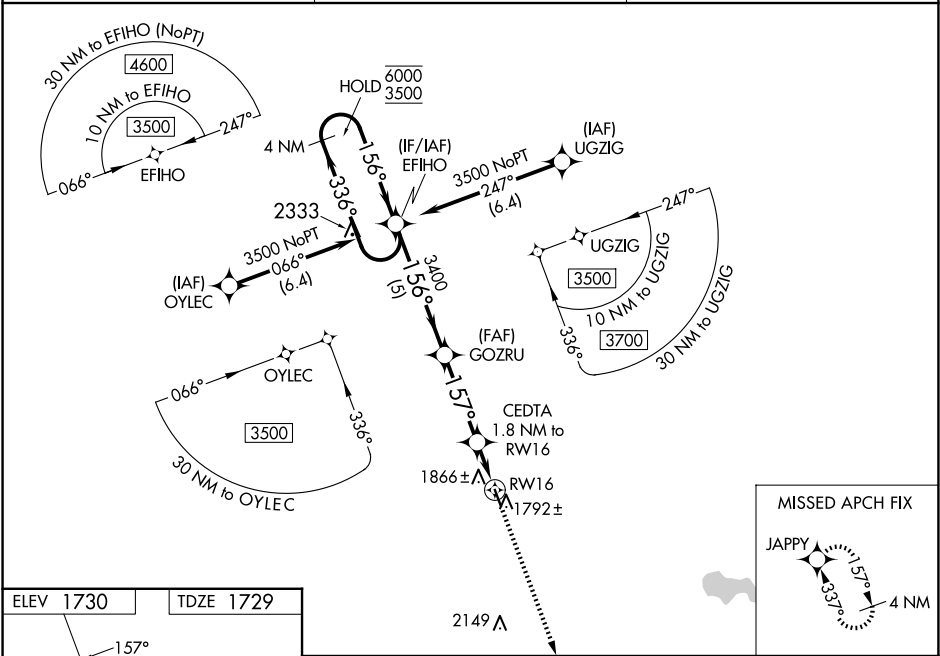

4 NM Holding Pattern EFIHO 6000 ← 336° 3500 → 156° GP 3.00° TCH 34				3600 JAPPY 3400 GOZRZU 3400 156° 157° 2340 1.1 NM to RW16 RW16 1.1 NM 0.7 3.3 NM 5 NM 1.8 NM to RW16 CEDTA			
CATEGORY	A	B	C	D			
LPV DA	1979-1	250 (300-1)	NA				
LNAV/VNAV DA	2120-1½	391 (400-1½)	NA				
LNAV MDA	2120-1	391 (400-1)	NA				
CIRCLING	2180-1	2220-1	NA				
	450 (500-1)	490 (500-1)					