RNAV (GPS) RWY 13

EKALAKA (97M)


WAAS CH 77747 W13A	APP CRS 130°	Rwy Ldg 3798 TDZE 3497 Apt Elev 3505

RNP APCH - GPS.

T A NA Baro-VNAV NA. Use BHK altimeter setting; when not received, use BWW altimeter setting and increase LPV DA to 3967 feet and all visibilities ¼ SM, increase LNAV/VNAV DA to 4320 feet; increase all MDAs 60 feet.

MISSED APPROACH: Climb to 7000 direct DUWOP and hold, continue climb-in-hold to 7000.

AWOS-3PT	BHK ASOS	SALT LAKE CENTER	CTAF
118.1	135.475	126.85 305.2	122.9 L

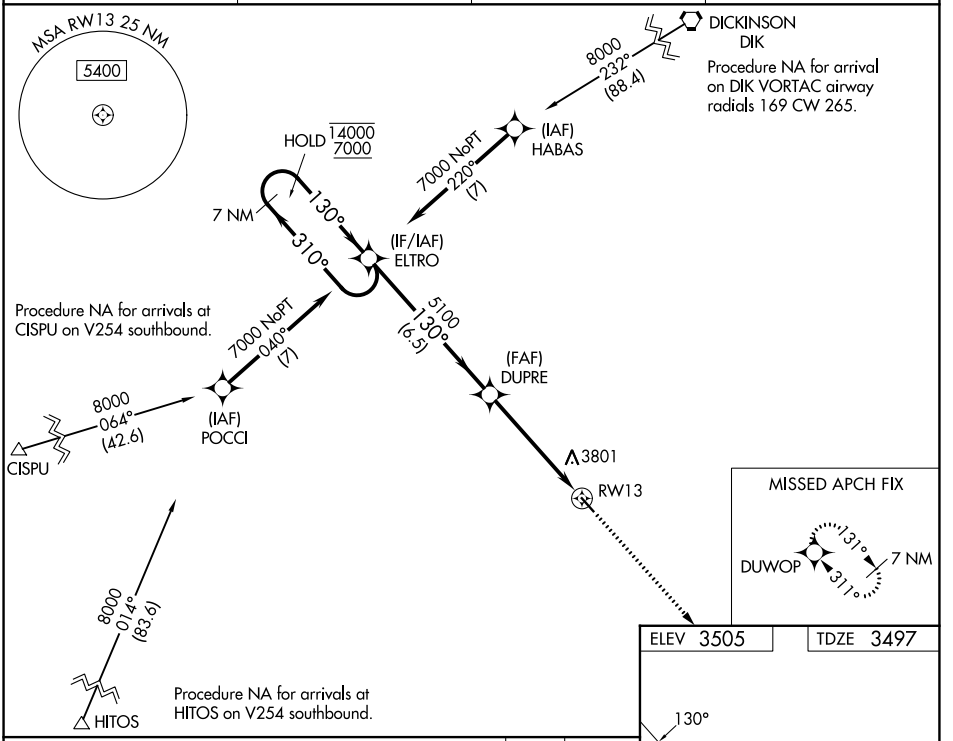

CATEGORY	A	B	C	D
LPV DA	3907-1⅛ 410 (500-1⅛)			
LNAV/VNAV DA	4260-2½ 763 (800-2½)			
LNAV MDA	4260-1 763 (800-1)	4260-1¼ 763 (800-1¼)	4260-2½ 763 (800-2½)	

NW-1, 01 OCT 2026 to 29 OCT 2026
NW-1, 01 OCT 2026 to 29 OCT 2026