RNAV (GPS) RWY 11

HYDE COUNTY (7W6)


WAAS	APP CRS	Rwy Ldg	5002
CH 40442	109°	TDZE	7
W11A		Apt Elev	7

RNP APCH - GPS.

VDP NA when using HSE altimeter setting. When local altimeter setting not received, use HSE altimeter setting and increase all MDAs 80 feet.

MISSED APPROACH: Climb to 500 then climbing right turn 3000 direct PUNGO and hold.

AWOS-3P	CHERRY POINT APP CON	UNICOM
119.275	119.75 360.775	122.7 (CTAF) L

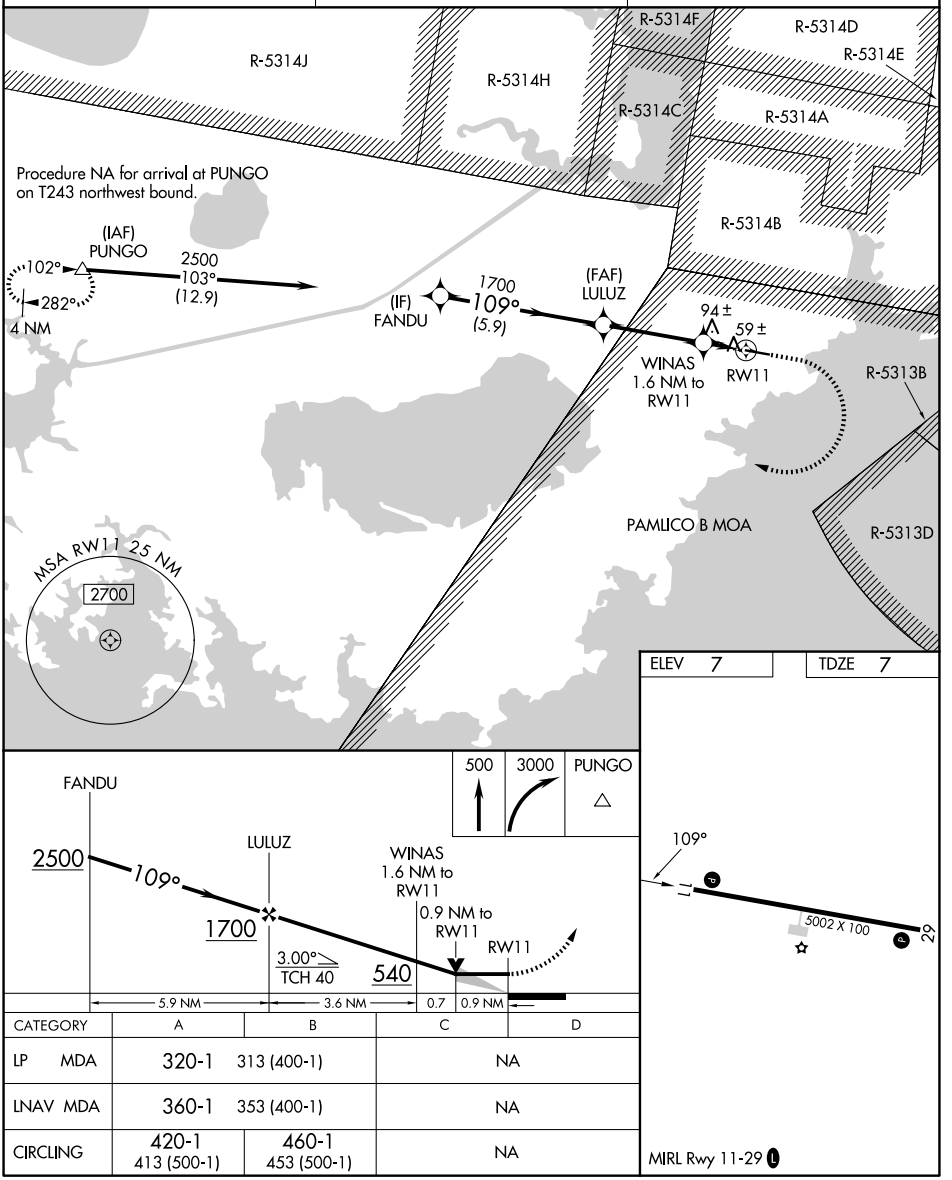

CATEGORY	A	B	C	D
LP MDA	320-1 313 (400-1)		NA	
LNAV MDA	360-1 353 (400-1)		NA	
CIRCLING	420-1 413 (500-1)	460-1 453 (500-1)	NA	

SE-2, 01 OCT 2026 to 29 OCT 2026
SE-2, 01 OCT 2026 to 29 OCT 2026