RNAV (GPS) RWY 9

FREMONT (14G)


APP CRS	Rwy Ldg	4011
095°	TDZE	663
	Apt Elev	663

RNP APCH.

T NA Procedure NA at night. Use Sandusky County Rgnl altimeter setting; when not received use Toledo Executive altimeter setting: increase all MDA 40 feet and LNAV Cat D and Circling Cat C and D visibility ¼ SM. Rwy 9 helicopter visibility reduction below 1 SM NA. Circling NA to Rwys 18-36.

MISSED APPROACH: Climbing right turn to 2600 direct KADBY and hold.

TOLEDO APP CON	UNICOM
126.1 307.0	122.8 (CTAF) L

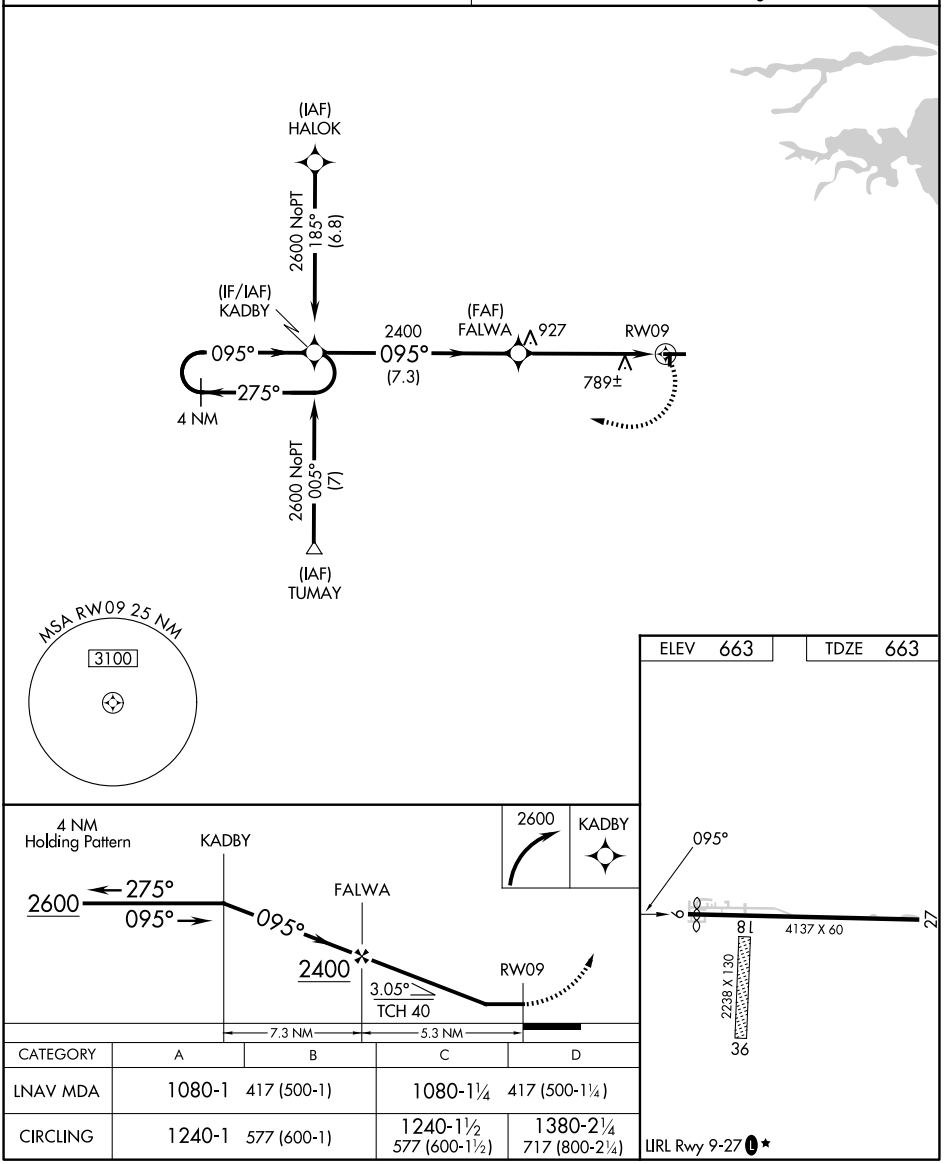

CATEGORY	A	B	C	D
LNAV MDA	1080-1	417 (500-1)	1080-1¼	417 (500-1¼)
CIRCLING	1240-1	577 (600-1)	1240-1½ 577 (600-1½)	1380-2¼ 717 (800-2¼)

LIRL Rwy 9-27 L ★

EC-2, 29 OCT 2026 to 26 NOV 2026
EC-2, 29 OCT 2026 to 26 NOV 2026