WAAS	APP CRS	Rwy Ldg	5004
CH 90228	095°	TDZE	754
W09A		Apt Elev	754

RNAV (GPS) RWY 9


GRATIOT COMMUNITY (AMN)

RNP APCH - GPS.


Rwy 9 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using MOP altimeter setting. When local altimeter setting not received, use MOP altimeter setting: increase LPV DA to 1071 feet; increase LNAV/VNAV DA to 1199 feet and all visibilities ¼ SM; increase all MDAs 60 feet and LNAV visibility Cat C and D ¼ SM.

MISSED APPROACH: Climb to 2600 direct CEGEE and hold.

AWOS-3P	GREAT LAKES APP CON*	UNICOM
124.175	126.45 235.625	122.8 (CTAF) L

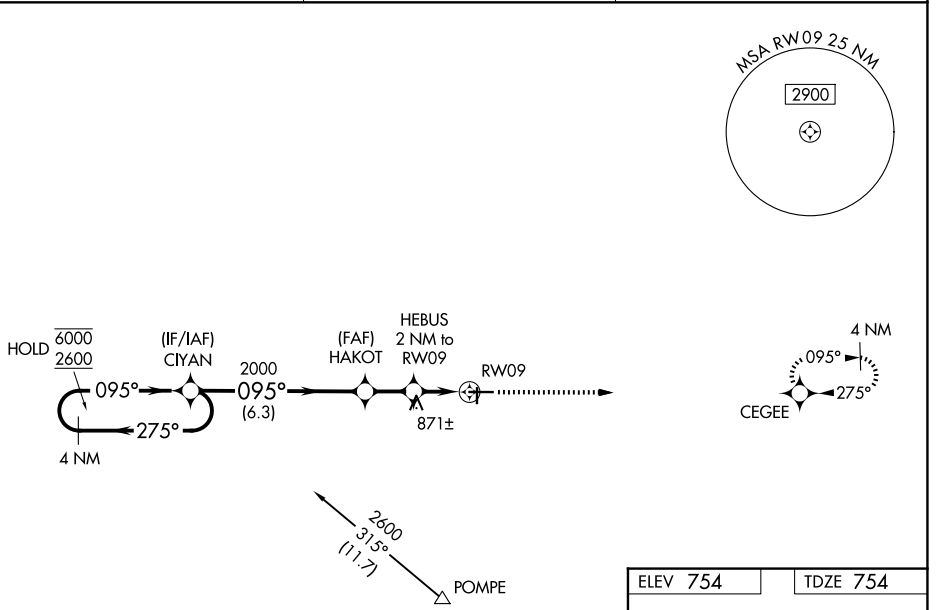


Procedure NA for arrivals at POMPE on V274 northeast bound.

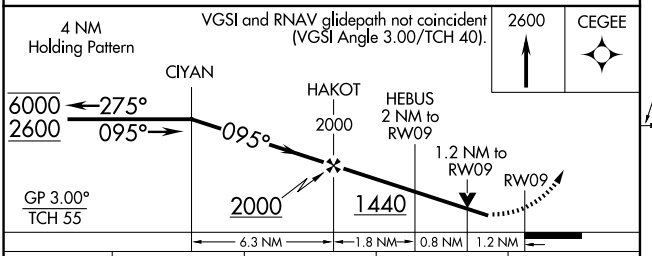

CATEGORY	A	B	C	D
LPV DA	1029-1 275 (300-1)			
LNAV/VNAV DA	1157-1⅛ 403 (500-1⅛)			
LNAV MDA	1160-1 406 (500-1)		1160-1⅛ 406 (500-1⅛)	

ELEV 754 TDZE 754



REIL Rwys 9 and 27 L
MIRL Rwys 9-27 and 18-36 L

EC-1, 29 OCT 2026 to 26 NOV 2026
EC-1, 29 OCT 2026 to 26 NOV 2026