WAAS	APP CRS	Rwy Idg	4589
CH 90225	048°	TDZE	45
W05A		Apt Elev	45

RNAV (GPS) RWY 5


NUIQSUT (AQT) (PAQT)

T A Inoperative table does not apply. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C (-13°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Deadhorse altimeter setting and increase all DA 123 feet and all MDA 140 feet, increase LPV all Cats, LNAV/VNAV all Cats, and Circling Cat C visibility ¼ mile, increase LNAV Cat C visibility ½ mile. VDP and Baro-VNAV NA with Deadhorse altimeter setting.


MALSF


MISSED APPROACH: Climb to 1700 direct IQUQU and hold.

ASOS	ANCHORAGE CENTER	DEADHORSE RADIO	CTAF
135.35	119.4	122.5	122.8 L

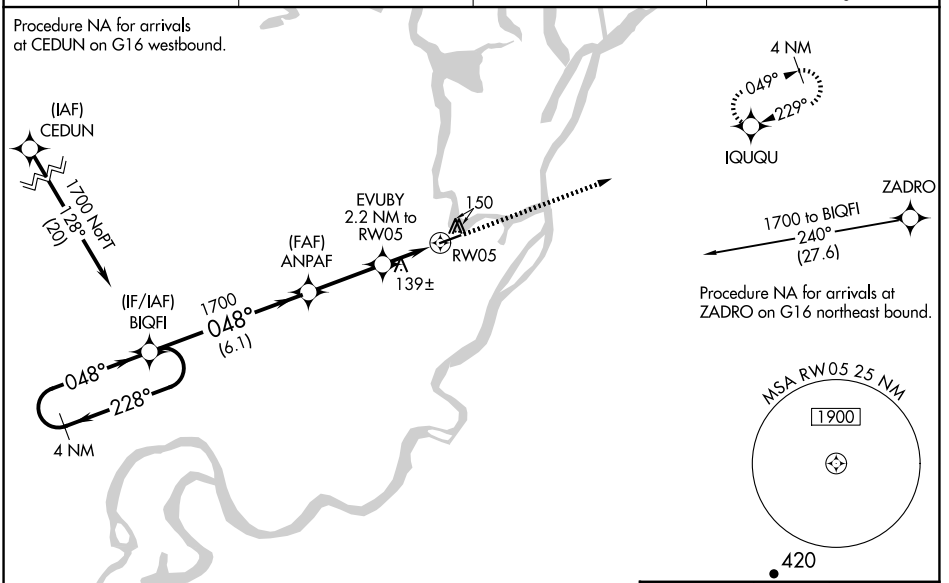

ELEV 45	TDZE 45

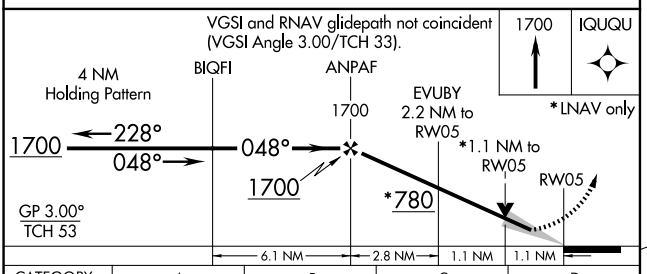



CATEGORY	A	B	C	D
LPV DA	295-1 250 (300-1)			NA
LNAV/VNAV DA	295-1 250 (300-1)			NA
LNAV MDA	440-1 395 (400-1)		440-1⅛ 395 (400-1⅛)	NA
CIRCLING	520-1 475 (500-1)		520-1½ 475 (500-1½)	NA

MIRL Rwy 5-23 L
REIL Rwy 23 L

AK, 29 OCT 2026 to 24 DEC 2026
AK, 29 OCT 2026 to 24 DEC 2026