RNAV (GPS) RWY 14

PLATINUM (PTU)(PAPM)


WAAS	APP CRS	Rwy Ldg	5000
CH 86640	144°	TDZE	18
W14A		Apt Elev	18


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. Baro-VNAV and VDP NA when using TOG/PATG altimeter setting. When local altimeter setting not received, use TOG/PATG altimeter setting and increase LPV DA to 371 feet; increase LNAV/VNAV DA to 424 feet and all visibilities ⅛ SM; increase all MDAs 120 feet and increase LNAV and Circling Cat C visibility ¼ SM.

MISSED APPROACH: Climb to 500 then climbing right turn to 2500 direct FELTI and hold.

AWOS-3P	ANCHORAGE CENTER	UNICOM
118.375	124.2 251.1	122.8 (CTAF) L

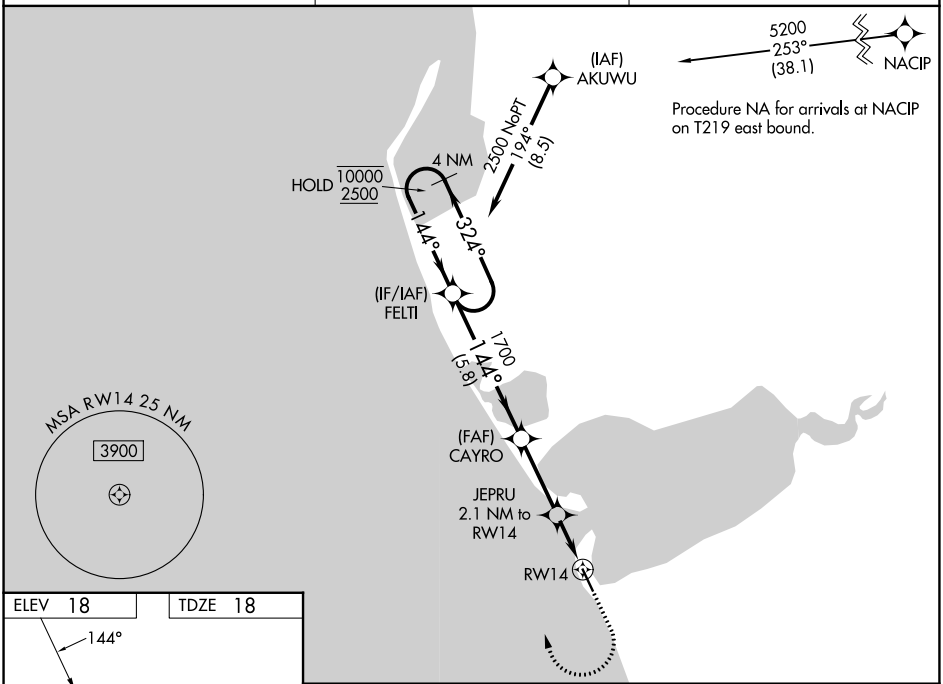

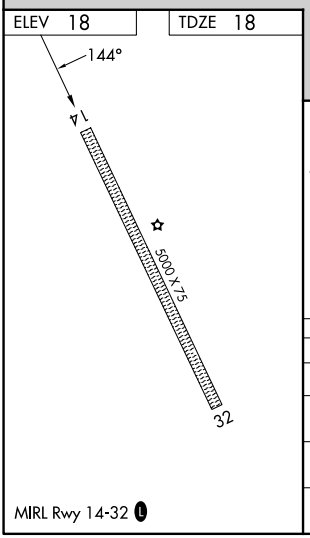

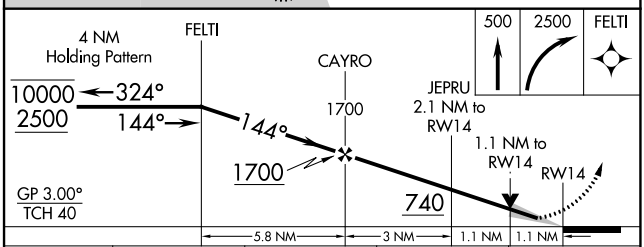

CATEGORY	A	B	C	D
LPV DA	268-1 250 (300-1)			NA
LNAV/VNAV DA	321-1 303 (400-1)			NA
LNAV MDA	400-1 382 (400-1)		400-1⅛ 382 (400-1⅛)	NA
CIRCLING	460-1 442 (500-1)	480-1 462 (500-1)	520-1½ 502 (600-1½)	NA

MIRL Rwy 14-32 L

AK, 29 OCT 2026 to 24 DEC 2026
AK, 29 OCT 2026 to 24 DEC 2026