RNAV (GPS) RWY 17

KENNETH COPELAND (4T2)


WAAS	APP CRS	Rwy Ldg	5943
CH 62840	171°	TDZE	693
W17A		Apt Elev	693


RNP APCH.

NA Baro-VNAV and VDP NA when using Fort Worth Meacham Intl altimeter setting. Rwy 17 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Obtain local altimeter setting on CTAF; when not received, use Fort Worth Meacham Intl altimeter setting: Increase LPV DA to 973 feet; increase LNAV/VNAV DA to 1135 feet; increase all MDA 40 feet and LNAV Cat C/D and Circling Cat C visibility ¼ SM.


MISSED APPROACH: Climb to 1200 then climbing right turn to 3100 direct ODGOY and hold.

LONE STAR APP CON	UNICOM
125.8 257.95	123.075 (CTAF) L

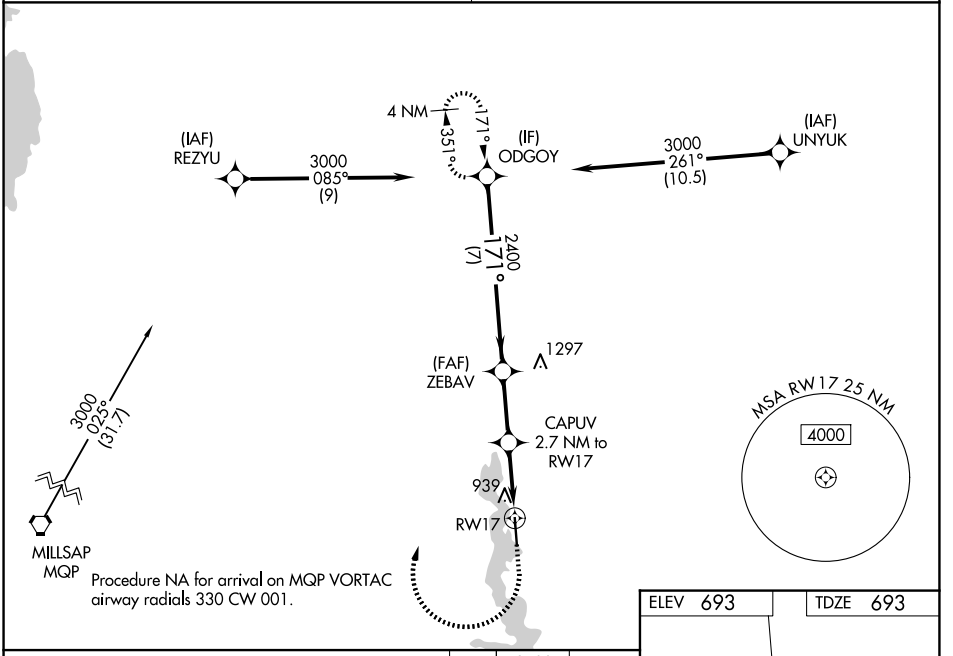

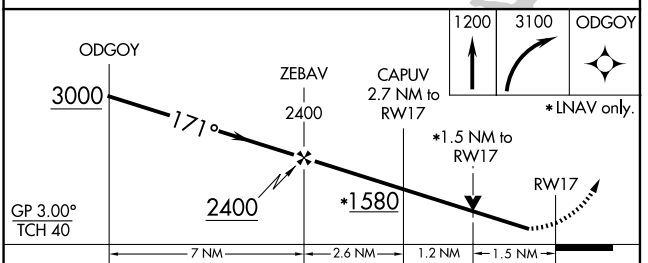

CATEGORY	A	B	C	D
LPV DA	943-1 250 (300-1)			
LNAV/VNAV DA	1105-1⅜ 412 (500-1⅜)			
LNAV MDA	1200-1 507 (600-1)		1200-1⅜ 507 (600-1⅜)	
CIRCLING	1240-1 547 (600-1)		1340-1¾ 647 (700-1¾)	1440-2½ 747 (800-2½)

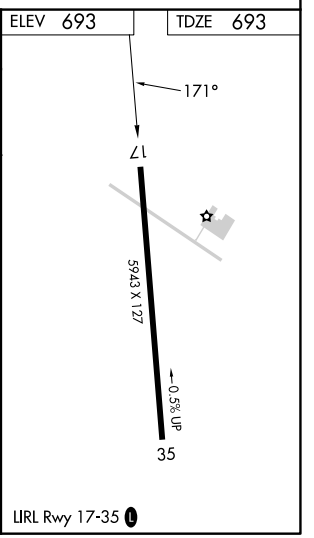

SC-2, 29 OCT 2026 to 26 NOV 2026
SC-2, 29 OCT 2026 to 26 NOV 2026