

WAAS CH 63013 W15A	APP CRS 147°	Rwy Ldg 4001 TDZE 21 Apt Elev 24
--	------------------------	---

RNAV (GPS) RWY 15



SHAKTOOLIK (2C7) (PFSH)

RNP APCH.


T Baro-VNAV and VDP NA when using Unalakeet altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. When local altimeter setting not received use Unalakeet altimeter setting and increase all DA 72 feet and all MDA 80 feet; increase LNAV Cats C and D visibility $\frac{1}{8}$ SM, and Circling Cat D visibility $\frac{1}{4}$ SM.

MISSED APPROACH: Climb to 3500 direct FANUB and hold, continue climb-in-hold to 3500.

AWOS-3P 124.175	ANCHORAGE CENTER 135.7 335.5	NOME RADIO 122.3	CTAF 122.8 0
---------------------------	--	----------------------------	------------------------

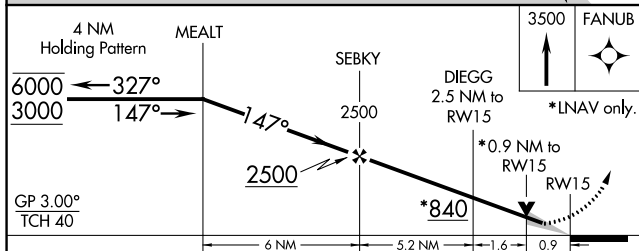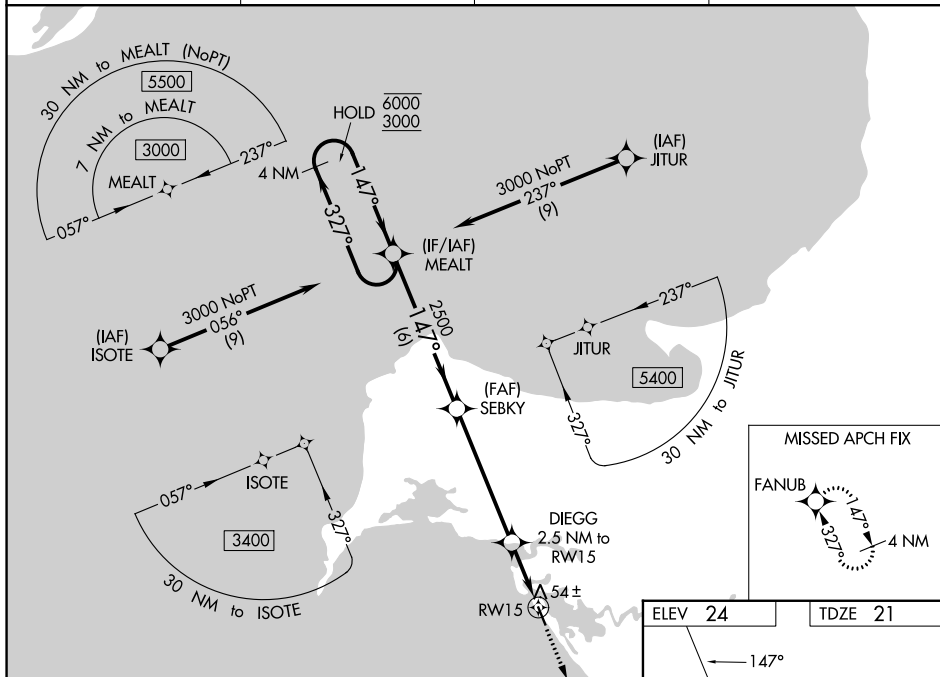

CATEGORY	A	B	C	D
LPV DA		271-1	250 (300-1)	
LNAV/ VNAV DA		271-1	250 (300-1)	
LNAV MDA		360-1	339 (400-1)	
CIRCLING	480-1 456 (500-1)		480-1½ 456 (500-1½)	740-2¼ 716 (800-2¼)

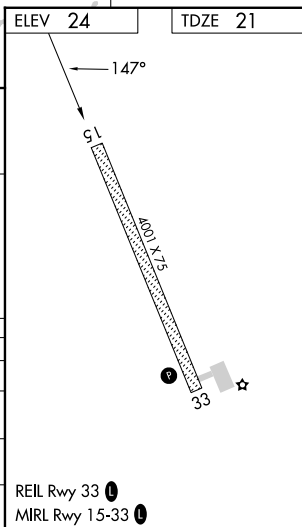

RNAV (GPS) RWY 15