


|                                        |                        |                                                               |
|----------------------------------------|------------------------|---------------------------------------------------------------|
| WAAS<br>CH <b>56621</b><br><b>W13A</b> | APP CRS<br><b>129°</b> | Rwy Ldg <b>5000</b><br>TDZE <b>868</b><br>Apt Elev <b>868</b> |
|----------------------------------------|------------------------|---------------------------------------------------------------|

RNAV (GPS) RWY 13

OMAR N BRADLEY (MBY)

|                                                                                                                                                      |                                                       |
|------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|
| RNP APCH-GPS.                                                                                                                                        | MISSED APPROACH: Climb to 3100 direct VETTS and hold. |
| <div><div></div><div>Circling to Rwy 5, 23, 31 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.</div></div> |                                                       |

|                            |                                          |                                 |
|----------------------------|------------------------------------------|---------------------------------|
| AWOS-3PT<br><b>120.025</b> | KANSAS CITY CENTER<br><b>132.6 370.9</b> | UNICOM<br><b>122.7 (CTAF) 0</b> |
|----------------------------|------------------------------------------|---------------------------------|

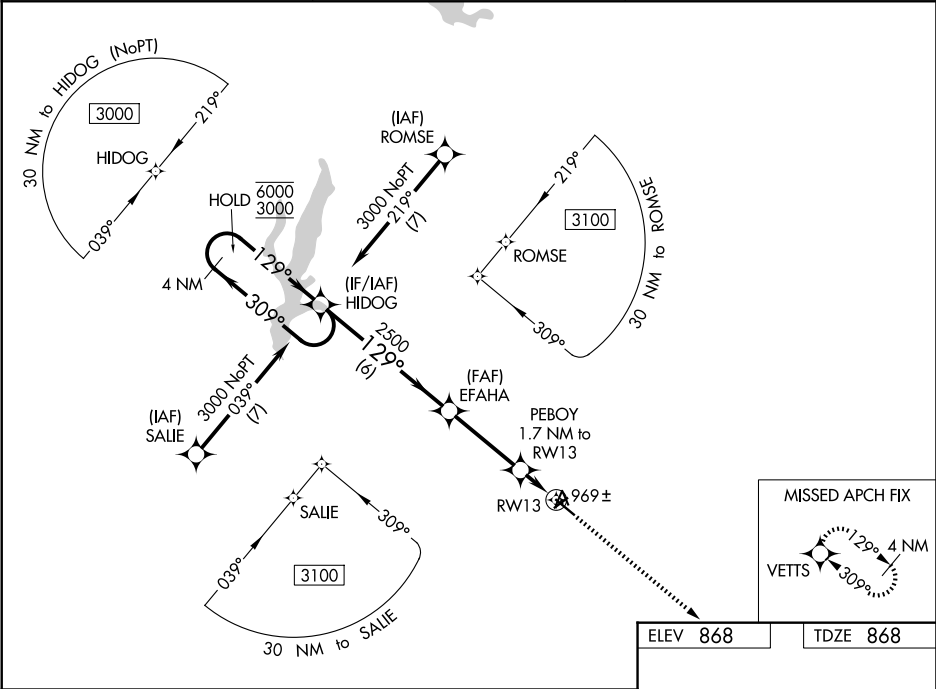

|                      |                       |                       |                         |                      |      |       |
|----------------------|-----------------------|-----------------------|-------------------------|----------------------|------|-------|
| 4 NM Holding Pattern |                       | HIDOG                 | EFAHA                   | PEBOY 1.7 NM to RW13 | 3100 | VETTS |
| 6000<br>3000         |                       | ←309°<br>→129°        | 129°                    | 2500                 | ↑    | ★     |
| GP 3.00°<br>TCH 42   |                       |                       | 2500                    | 1400                 |      |       |
|                      |                       | 6 NM                  | 3.3 NM                  | 0.7 NM               | 1 NM |       |
| CATEGORY             | A                     | B                     | C                       | D                    |      |       |
| LPV DA               | 1118-¾                | 250 (300-¾)           |                         | NA                   |      |       |
| LNAV/VNAV DA         | 1139-⅞                | 271 (300-⅞)           |                         | NA                   |      |       |
| LNAV MDA             | 1220-1                | 352 (400-1)           |                         | NA                   |      |       |
| CIRCLING             | 1380-1<br>512 (600-1) | 1440-1<br>572 (600-1) | 1520-1¾<br>652 (700-1¾) | NA                   |      |       |

