

LOC I-CPQ 111.7	APP CRS 096°	Rwy Ldg 8506
		TDZE 861
		Apt Elev 861

ILS or LOC RWY 10R

CAPITAL REGION INTL (LAN)



RADAR required.

▼ Rwy 10R helicopter visibility reduction below RVR 4000 NA.
 ▲ For inop ALS, increase S-ILS 10R all Cats to RVR 4500 and S-LOC 10R Cats A/B to RVR 5500 and Cats C/D to 1/2 SM.

MALSR

MISSED APPROACH: Climb to 2000 then climbing left turn to 2700 on heading 070° and on FNT VORTAC R-257 to ERRYS INT and hold.

ATIS 119.75	GREAT LAKES APP CON * 118.65 226.4	LANSING TOWER 119.9 240.9	GND CON 121.9
-----------------------	--	-------------------------------------	-------------------------

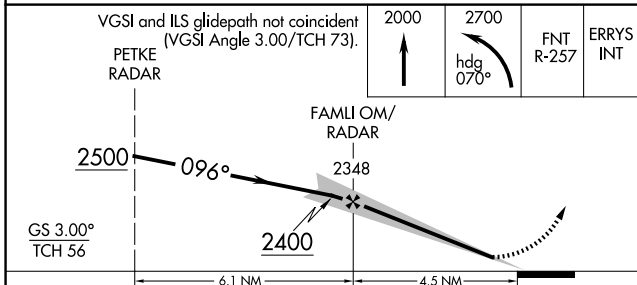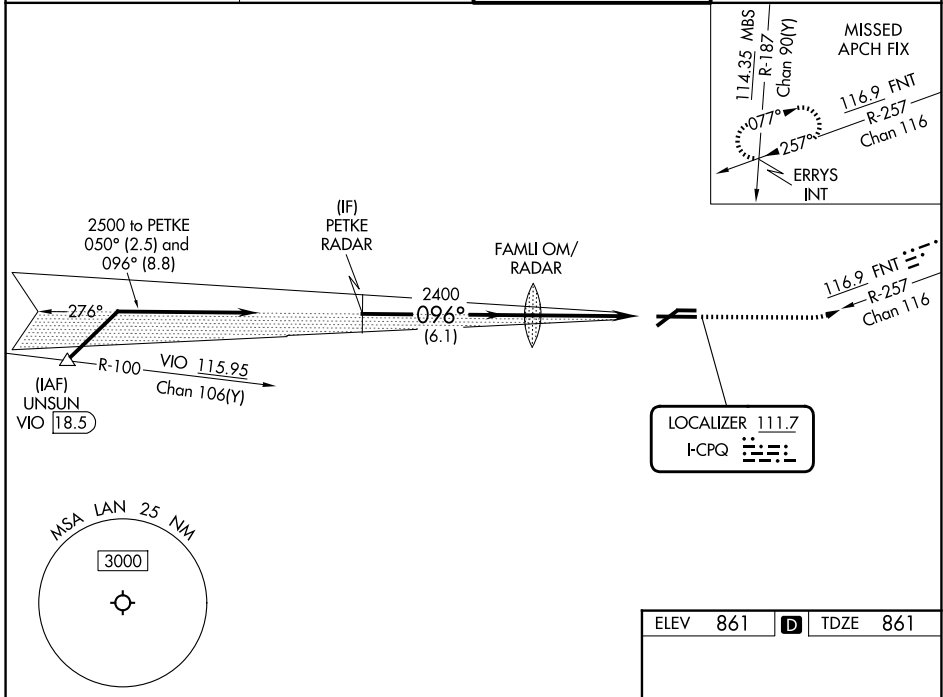

ELEV 861	D	TDZE 861
----------	----------	----------

096°

AS

10R 10L

3601 X 75

28L 28R

8506 X 150

TWR

5000 X 120

REIL Rwy 6 and 24
 HIRL Rwy 10R-28L
 MIRL Rwy 6-24

FAF to MAP 4.5 NM

Knots	60	90	120	150	180
Min:Sec	4:30	3:00	2:15	1:48	1:30

CATEGORY	A	B	C	D
S-ILS 10R		1153/40	292 (300-3/4)	
S-LOC 10R	1340/40	479 (500-3/4)	1340/50	479 (500-1)
CIRCLING	1340-1	479 (500-1)	1600-2 739 (800-2)	1760-3 899 (900-3)

EC-1, 11 JUN 2026 to 09 JUL 2026

EC-1, 11 JUN 2026 to 09 JUL 2026