

LOC I-MSS 108.7	APP CRS 045°	Rwy Ldg 5601
		TDZE 205
		Apt Elev 221

ILS or LOC RWY 5


MASSENA INTL-RICHARDS FLD (MSS)

ADF required. ADF and RADAR required for procedure entry.

NA Circling Rwy 9, 23, 27 NA at night. When local altimeter setting not received, use PTD altimeter setting: increase S-ILS 5 DA to 528 feet and all visibilities ¼ SM; increase all MDAs 80 feet and S-LOC 5 visibility Cats C and D ½ SM, and Circling visibility Cats C and D ¼ SM.




MISSED APPROACH:
Climb to 1200 then climbing left turn to 2300 direct MISSE LOM and hold.

ASOS 128.075	BOSTON CENTER 135.25 377.1	UNICOM 123.0 (CTAF) 0
------------------------	--------------------------------------	---------------------------------

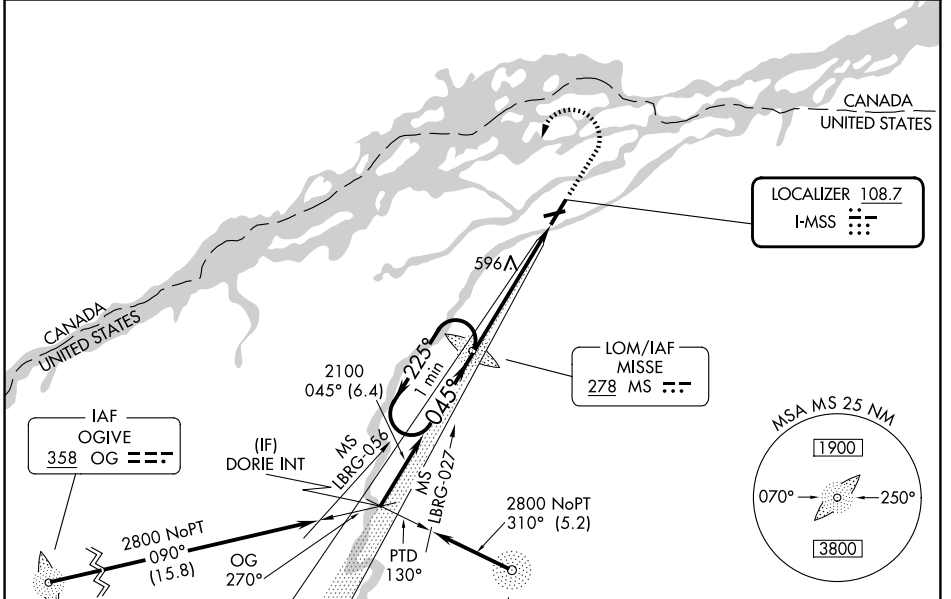

LOCALIZER 108.7
I-MSS

LOM/IAF MISSE
278 MS

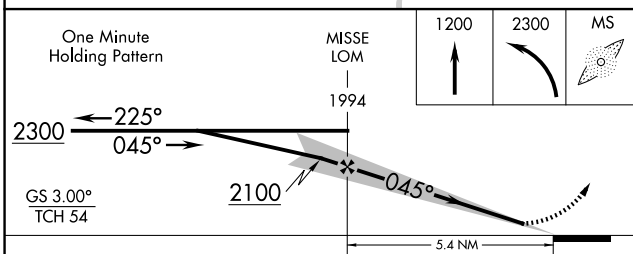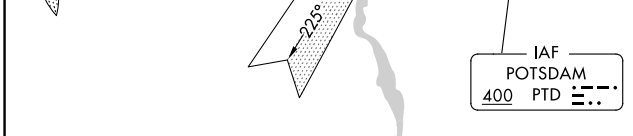

ELEV 221	TDZE 205
REIL Rwys 5, 9 and 27	
HIRL Rwy 5-23	
MIRL Rwy 9-27	

FAF to MAP 5.4 NM
Knots: 60, 90, 120, 150, 180
Min:Sec: 5:24, 3:36, 2:42, 2:10, 1:48

CATEGORY	A	B	C	D
S-ILS 5		455-¾	250 (300-¾)	
S-LOC 5	800-1	595 (600-1)	800-1¾	595 (600-1¾)
CIRCLING	800-1	579 (600-1)	880-1¾	900-2¼
			659 (700-1¾)	679 (700-2¼)

NE-2, 11 JUN 2026 to 09 JUL 2026

NE-2, 11 JUN 2026 to 09 JUL 2026