

WAAS CH 56538 W18A	APP CRS 181°	Rwy Ldg 5002 TDZE 845 Apt Elev 845
--	------------------------	---


RNAV (GPS) RWY 18
NORTH CENTRAL MISSOURI RGNL (M08)

RNP APCH.

NA For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using Kirksville altimeter setting. When local altimeter setting not received, use Kirksville altimeter setting and increase LPV and LNAV/VNAV DA all Cats to 1179 feet and increase visibility 1/8 mile all Cats; increase all MDA 100 feet and increase LNAV Cat C/D visibility 3/8 mile and Circling Cat C visibility 1/4 mile. Rwy 18 helicopter visibility reduction below 3/4 SM NA.

MISSED APPROACH:
Climb to 3000 direct
CUKIT and hold.

AWOS-2 118.425	KANSAS CITY CENTER 125.25 235.975	CTAF 122.9 0
--------------------------	---	------------------------

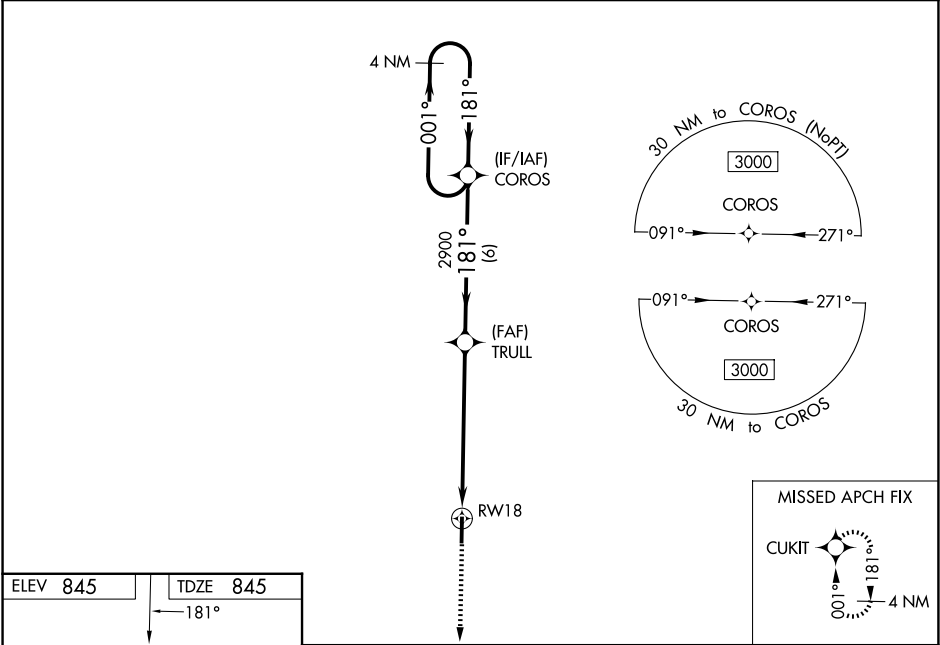

ELEV **845** TDZE **845**

181°

81

5002 X 75

0.4% UP

36

REIL Rwy 18 and 36

MIRL Rwy 18-36

3000 ↑	CUKIT 	COROS 4 NM Holding Pattern		
*LNAV only	*1.5 NM to RW18	TRULL 2900	001° → 3000 ← 181°	
RW18	1.5	4.8 NM	6 NM	
		181°	2900	
			GP 3.00° TCH 40	
CATEGORY	A	B	C	D
LPV DA	1095-1 250 (300-1)			
LNAV/VNAV DA	1095-1 250 (300-1)			
LNAV MDA	1360-1	515 (600-1)	1360-1 3/8	515 (600-1 3/8)
CIRCLING	1360-1	515 (600-1)	1360-1 1/2 515 (600-1 1/2)	1400-2 555 (600-2)

NC-3, 09 JUL 2026 to 06 AUG 2026

NC-3, 09 JUL 2026 to 06 AUG 2026