
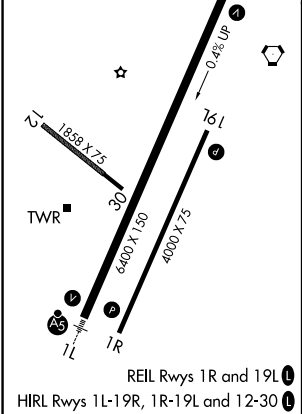


LOC/DME I-BET	APP CRS	Rwy Ldg	6400
111.5	192°	TDZE	120
Chan 52		Apt Elev	129

ILS Y or LOC Y RWY 19R
BETHEL (BET)(PABE)

DME required. RNAV 1-GPS required.	MALSR	MISSED APPROACH: Climb to 1700 then climbing right turn to 2000 direct ROLLR and hold.
⚠ Circling NA west of Rwy 1L-19R. For inop ALS, increase S-LOC-19R Cat C/D visibility to RVR 4000. # RVR 1800 authorized with use of FD or AP or HUD to DA.		

ATIS 119.8	ANCHORAGE CENTER 125.2 372.0	BETHEL TOWER ★ 118.7 (CTAF) 0	GND CON 121.7
---------------	---------------------------------	----------------------------------	------------------

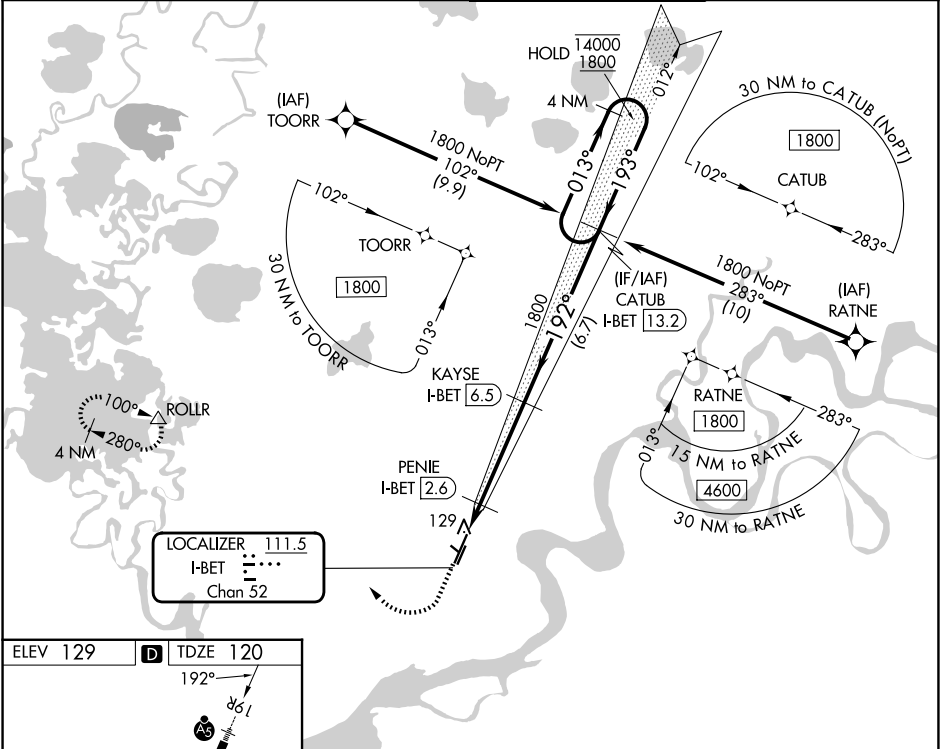

ELEV 129	TDZE 120	192°	36 L
		0.4% UP	
		16 L	
		30	
		6400 X 150	
		4000 X 75	
		1L	
		1R	
		REIL Rwy 1R and 19L	
		HIRL Rwy 1L-19R, 1R-19L and 12-30	

1700	2000	ROLLR	KAYSE I-BET 6.5	CATUB I-BET 13.2	4 NM Holding Pattern
*LOC only	PENIE I-BET 2.6	1800	1800	1800	013° → 14000 ← 193° 1800
I-BET 1.3	*I-BET 2	560*			GS 3.00° TCH 52
0.7	0.6	3.9 NM	6.7 NM		

CATEGORY	A	B	C	D
S-ILS 19R#	320/24	200 (200-½)		
S-LOC 19R	380/24	260 (300-½)		
CIRCLING	500-1 371 (400-1)	600-1 471 (500-1)	600-1½ 471 (500-1½)	680-2 551 (600-2)